


Specification Obstruction light of control box

BSE OBSTRUCTION LIGHT CONTROLLERS

Made in Thailand

Model:TS1D-2203

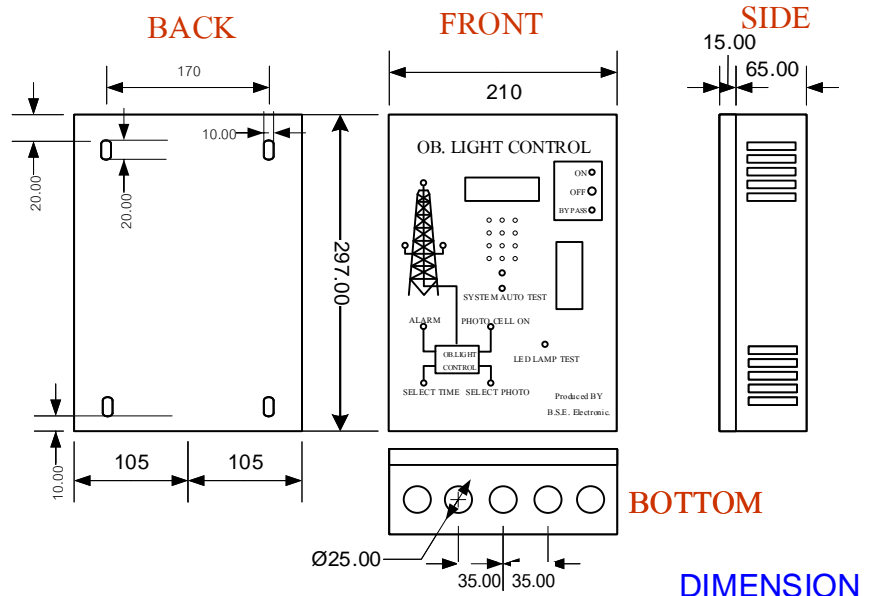

@ Installation 1-2 Level (Set By Keypad switch)

OPERATION SYSTEM

1. Controlled by Micro Controller system with highly accuracy
2. Input Voltage range 220-230 Vac , Output 48 Vdc
3. Output 3 line : Load highly 1 Amp. per line . Type of lamp is LED lamp 48 Vdc and In every line Input with 1-2 lamp
4. This Data Out Connect Input out side the equipment when you want to working together with the OB. Light

OPERATION MODE

1. By Pass Mode : Operate instantaneously (OB. Lights burn on steadily) and continuously by electric power. It will not operate when change mode or turn off .
2. Auto Mode : Two control systems which work in parallel (Photo LDR & Timer) or only timer system.
3. Off Mode : Not electric power in the system .

CONTROL OB. LIGHT

1. Timer system : Controlling the LED lamp by turning on and off at the preset time in the memory system and users can set up by themselves
2. Photo LDR system : Controlling the LED lamp by controlling resistance which changes by brightness (Photo LDR)

OPERATIONAL CHARACTERISTICS

- : Line 1, Line 2 and Line 3 ; OB. lights having individual ob. light pattern changeable into flashing , turn on and turn off
- : Operating status indication at front of control box
- : Flashing rate adjustment 20-40 times / minute at 2 : 1 ratio (ON : OFF)

ALARM SYSTEM

: The control box has alarm when ob. light fails including loose cable and short circuit , back up battery voltage is low, Photo LDR has problem , in case of LED performance is 30 % lower , it will display on screen of LCD by message that load as problem , shown at front of control box and then alert with alarm contact (contact of relay will on NC)

SURGE PROTECTION SYSTEM

: Transient protection of the standard at the level 6 KV 3 KA ,

Reference Standards : 1. IEEE C62.41-1991 ; IEEE Recommended practice surge voltages in low - voltage AC power circuits .

: 2. IEEE C62.45-1992 ; IEEE Guide ON Surge Testing for Equipment connect to Low - voltage AC power circuit

SIZE OF THE BOX

: 210 mm. 297 mm. 80 mm. (W x L x H) , Weight ~ 3.3 kg

* Continuous product development is our commitment. In that manner, the above specifications may be changed without prior notice.



B.S.E.ELECTRONIC CO.LTD 29/110 SOI KANJANAPISEK 005/1 WONGWAENROBNOK

RD.BANGKHAE,BANGKHAE,BANGKOK. 10160.

Tel. (662) 803-6303-4, (662) 803-7637, Fax. (662)803-7636